


Flexure Test

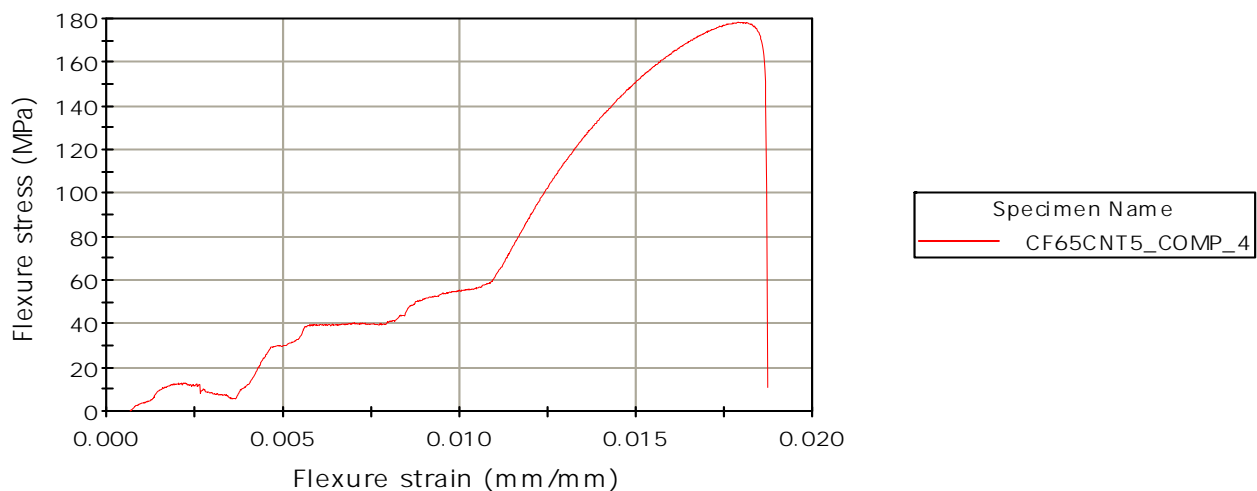

	Specimen label	Rate 1 (mm/min)	Support span (mm)	Thickness (mm)	Width (mm)
1	CF65CNT5_COMP_4	1.00000	60.00000		
Coefficient of Variation		-----	-----		
Maximum		1.00000	60.00000		
Mean		1.00000	60.00000		
Median		1.00000	60.00000		
Minimum		1.00000	60.00000		
Range		0.00000	0.00000		
Standard Deviation		-----	-----		

	Flex ext at Break (Standard) (mm)	Flex stress at Max Flex load (MPa)	Max Flexure load (N)	Flex ext at Max Flex load (mm)	Flex strain at Max Flex load (mm/mm)
1	2.24239	178.541	146.06870	2.144	0.018
Coefficient of Variation	-----	-----	-----	-----	-----
Maximum	2.24239	178.541	146.06870	2.144	0.018
Mean	2.24239	178.541	146.06870	2.144	0.018
Median	2.24239	178.541	146.06870	2.144	0.018
Minimum	2.24239	178.541	146.06870	2.144	0.018
Range	0.00000	0.000	0.00000	0.000	0.000
Standard Deviation	-----	-----	-----	-----	-----

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
1	16995.52	11.077	13.539	6238.338
Coefficient of Variation	-----	-----	-----	-----
Maximum	16995.52	11.077	13.539	6238.338
Mean	16995.52	11.077	13.539	6238.338
Median	16995.52	11.077	13.539	6238.338
Minimum	16995.52	11.077	13.539	6238.338
Range	0.00	0.000	0.000	0.000

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
Standard Deviation	-----	-----	-----	-----