


## Flexure Test

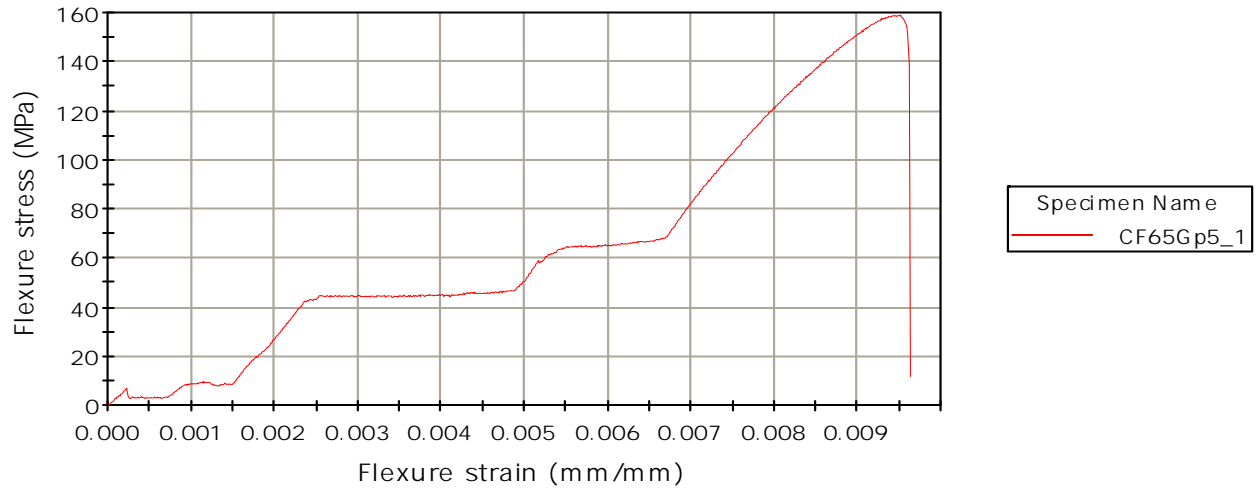

	Specimen label	Rate 1 (mm/min)	Support span (mm)	Thickness (mm)	Width (mm)
1	CF65Gp5_1	1.00000	72.00000		
Coefficient of Variation		-----	-----		
Maximum		1.00000	72.00000		
Mean		1.00000	72.00000		
Median		1.00000	72.00000		
Minimum		1.00000	72.00000		
Range		0.00000	0.00000		
Standard Deviation		-----	-----		

	Flex ext at Break (Standard) (mm)	Flex stress at Max Flex load (MPa)	Max Flexure load (N)	Flex ext at Max Flex load (mm)	Flex strain at Max Flex load (mm/mm)
1	1.66280	159.153	108.50567	1.643	0.010
Coefficient of Variation	-----	-----	-----	-----	-----
Maximum	1.66280	159.153	108.50567	1.643	0.010
Mean	1.66280	159.153	108.50567	1.643	0.010
Median	1.66280	159.153	108.50567	1.643	0.010
Minimum	1.66280	159.153	108.50567	1.643	0.010
Range	0.00000	0.000	0.00000	0.000	0.000
Standard Deviation	-----	-----	-----	-----	-----

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
1	40613.79	5.048	7.404	27696.991
Coefficient of Variation	-----	-----	-----	-----
Maximum	40613.79	5.048	7.404	27696.991
Mean	40613.79	5.048	7.404	27696.991
Median	40613.79	5.048	7.404	27696.991
Minimum	40613.79	5.048	7.404	27696.991
Range	0.00	0.000	0.000	0.000

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
Standard Deviation	-----	-----	-----	-----