


## Flexure Test

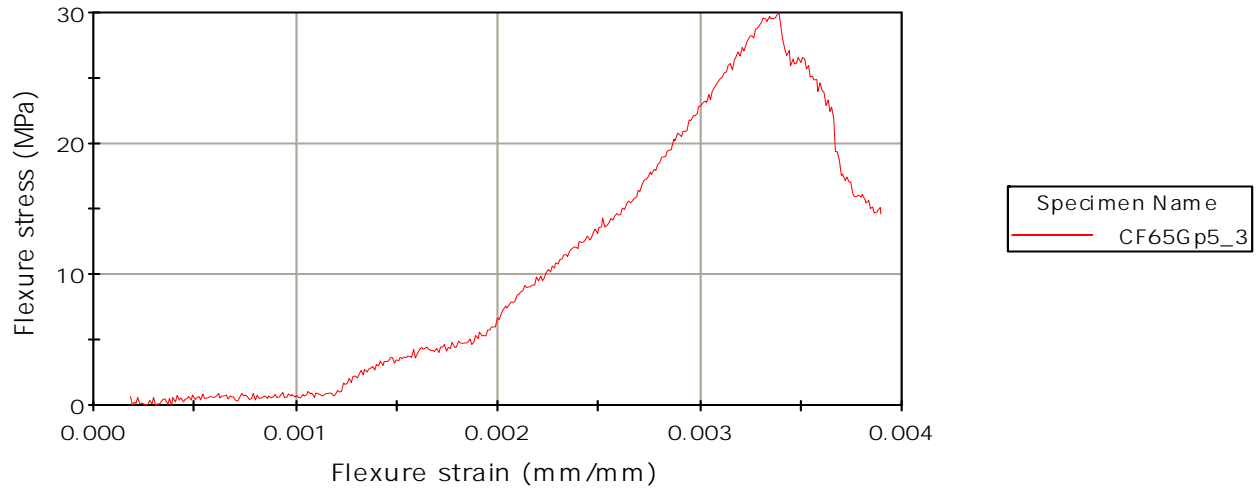

	Specimen label	Rate 1 (mm/min)	Support span (mm)	Thickness (mm)	Width (mm)
1	CF65Gp5_3	1.00000	72.00000		
Coefficient of Variation		-----	-----		
Maximum		1.00000	72.00000		
Mean		1.00000	72.00000		
Median		1.00000	72.00000		
Minimum		1.00000	72.00000		
Range		0.00000	0.00000		
Standard Deviation		-----	-----		

	Flex ext at Break (Standard) (mm)	Flex stress at Max Flex load (MPa)	Max Flexure load (N)	Flex ext at Max Flex load (mm)	Flex strain at Max Flex load (mm/mm)
1	0.67205	29.983	20.44150	0.585	0.003
Coefficient of Variation	-----	-----	-----	-----	-----
Maximum	0.67205	29.983	20.44150	0.585	0.003
Mean	0.67205	29.983	20.44150	0.585	0.003
Median	0.67205	29.983	20.44150	0.585	0.003
Minimum	0.67205	29.983	20.44150	0.585	0.003
Range	0.00000	0.000	0.00000	0.000	0.000
Standard Deviation	-----	-----	-----	-----	-----

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
1	3788.65	20.441	29.983	-----
Coefficient of Variation	-----	-----	-----	-----
Maximum	3788.65	20.441	29.983	-----
Mean	3788.65	20.441	29.983	-----
Median	3788.65	20.441	29.983	-----
Minimum	3788.65	20.441	29.983	-----
Range	0.00	0.000	0.000	-----

	Modulus (Automatic) (MPa)	Flex load at Yield (Zero Slope) (N)	Flex stress at Yield (Zero Slope) (MPa)	Modulus (E-modulus) (MPa)
Standard Deviation	-----	-----	-----	-----